

Relational Database Design Theory

CompSci 316
Introduction to Database Systems

Announcements (Thu. Sep. 12)

- ❖ Homework #1 due next Tuesday
 - If you haven't activated Azure, do it now!
 - All-electronic submission
- ❖ Piazza is up—use it more
 - There is also a thread for forming project teams
- ❖ Location for Rishi's office hours has changed

Motivation

SID	name	CID
142	Bart	CPS316
142	Bart	CPS310
857	Lisa	CPS316
857	Lisa	CPS330
--	--	--

- ❖ How do we tell if a design is bad, e.g., *StudentEnroll* (*SID*, *name*, *CID*)?
 - This design has redundancy, because the name of a student is recorded multiple times, once for each course the student is taking
 - Update, insertion, deletion anomalies
- ❖ How about a systematic approach to detecting and removing redundancy in designs?
 - Dependencies, decompositions, and normal forms

Functional dependencies

- ❖ A functional dependency (FD) has the form $X \rightarrow Y$, where X and Y are sets of attributes in a relation R
- ❖ $X \rightarrow Y$ means that whenever two tuples in R agree on all the attributes in X , they must also agree on all attributes in Y

X	Y	Z
a	b	c
a	b	?
...

Must be b ← ... → Could be anything

FD examples

Address (*street_address*, *city*, *state*, *zip*)

- ❖ $street_address, city, state \rightarrow zip$
- ❖ $zip \rightarrow city, state$
- ❖ $zip, state \rightarrow zip$?
 - This is a trivial FD
 - Trivial FD: $LHS \supseteq RHS$
- ❖ $zip \rightarrow state, zip$?
 - This is non-trivial, but not completely non-trivial
 - Completely non-trivial FD: $LHS \cap RHS = \emptyset$

Keys redefined using FD's

- A set of attributes K is a key for a relation R if
- ❖ $K \rightarrow$ all (other) attributes of R
 - That is, K is a "super key"
 - ❖ No proper subset of K satisfies the above condition
 - That is, K is minimal

Reasoning with FD's

7

Given a relation R and a set of FD's \mathcal{F}

- ❖ Does another FD follow from \mathcal{F} ?
 - Are some of the FD's in \mathcal{F} redundant (i.e., they follow from the others)?
- ❖ Is K a key of R ?
 - What are all the keys of R ?

Attribute closure

8

- ❖ Given R , a set of FD's \mathcal{F} that hold in R , and a set of attributes Z in R :
The closure of Z (denoted Z^+) with respect to \mathcal{F} is the set of all attributes $\{A_1, A_2, \dots\}$ functionally determined by Z (that is, $Z \rightarrow A_1 A_2 \dots$)
- ❖ Algorithm for computing the closure
 - Start with closure = Z
 - If $X \rightarrow Y$ is in \mathcal{F} and X is already in the closure, then also add Y to the closure
 - Repeat until no more attributes can be added

A more complex example

9

StudentGrade ($SID, name, email, CID, grade$)

- ❖ $SID \rightarrow name, email$
- ❖ $email \rightarrow SID$
- ❖ $SID, CID \rightarrow grade$

(Not a good design, and we will see why later)

Example of computing closure

10

- ❖ \mathcal{F} includes:
 - $SID \rightarrow name, email$
 - $email \rightarrow SID$
 - $SID, CID \rightarrow grade$
- ❖ $\{CID, email\}^+ = ?$
- ❖ $email \rightarrow SID$
 - Add SID ; closure is now $\{CID, email, SID\}$
- ❖ $SID \rightarrow name, email$
 - Add $name, email$; closure is now $\{CID, email, SID, name\}$
- ❖ $SID, CID \rightarrow grade$
 - Add $grade$; closure is now all the attributes in *StudentGrade*

Using attribute closure

11

Given a relation R and set of FD's \mathcal{F}

- ❖ Does another FD $X \rightarrow Y$ follow from \mathcal{F} ?
 - Compute X^+ with respect to \mathcal{F}
 - If $Y \subseteq X^+$, then $X \rightarrow Y$ follow from \mathcal{F}
- ❖ Is K a key of R ?
 - Compute K^+ with respect to \mathcal{F}
 - If K^+ contains all the attributes of R , K is a super key
 - Still need to verify that K is *minimal* (how?)

Rules of FD's

12

- ❖ Armstrong's axioms
 - Reflexivity: If $Y \subseteq X$, then $X \rightarrow Y$
 - Augmentation: If $X \rightarrow Y$, then $XZ \rightarrow YZ$ for any Z
 - Transitivity: If $X \rightarrow Y$ and $Y \rightarrow Z$, then $X \rightarrow Z$
- ❖ Rules derived from axioms
 - Splitting: If $X \rightarrow YZ$, then $X \rightarrow Y$ and $X \rightarrow Z$
 - Combining: If $X \rightarrow Y$ and $X \rightarrow Z$, then $X \rightarrow YZ$
- ☞ Using these rules, you can prove or disprove an FD given a set of FDs

Non-key FD's

13

- ❖ Consider a non-trivial FD $X \rightarrow Y$ where X is not a super key
 - Since X is not a super key, there are some attributes (say Z) that are not functionally determined by X

X	Y	Z
a	b	c_1
a	b	c_2
...

That b is always associated with a is recorded by multiple rows: redundancy, update/insertion/deletion anomaly

Example of redundancy


14

- ❖ *StudentGrade* ($SID, name, email, CID, grade$)
- ❖ $SID \rightarrow name, email$

SID	$name$	$email$	CID	$grade$
142	Bart	bart@fox.com	CPS316	B-
142	Bart	bart@fox.com	CPS310	B
123	Milhouse	milhouse@fox.com	CPS316	B+
857	Lisa	lisa@fox.com	CPS316	A+
857	Lisa	lisa@fox.com	CPS330	A+
456	Ralph	ralph@fox.com	CPS310	C
...

Decomposition


15

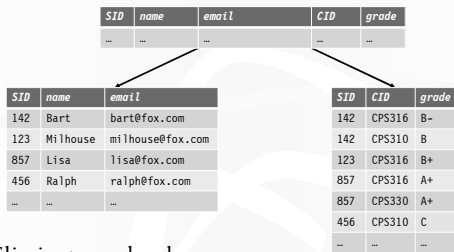

- ❖ Eliminates redundancy
- ❖ To get back to the original relation: \bowtie

Unnecessary decomposition


16

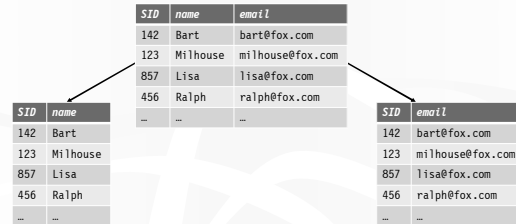

- ❖ Fine: join returns the original relation
- ❖ Unnecessary: no redundancy is removed; schema is more complicated (and SID is stored twice!)

Bad decomposition

17

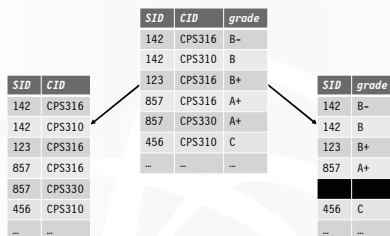

- ❖ Association between CID and $grade$ is lost
- ❖ Join returns more rows than the original relation

Lossless join decomposition

18

- ❖ Decompose relation R into relations S and T
 - $attrs(R) = attrs(S) \cup attrs(T)$
 - $S = \pi_{attrs(S)}(R)$
 - $T = \pi_{attrs(T)}(R)$
- ❖ The decomposition is a lossless join decomposition if, given known constraints such as FD's, we can guarantee that $R = S \bowtie T$
- ❖ Any decomposition gives $R \subseteq S \bowtie T$ (why?)
 - A lossy decomposition is one with $R \subset S \bowtie T$

Loss? But I got more rows!

19

❖ “Loss” refers not to the loss of tuples, but to the loss of information

- Or, the ability to distinguish different original relations

SID	CID	grade
142	CPS316	B
142	CPS310	B-
123	CPS316	B+
857	CPS316	A+
857	CPS330	A+
456	CPS310	C
...

No way to tell which is the original relation

SID	CID
142	CPS316
142	CPS310
123	CPS316
857	CPS316
857	CPS330
456	CPS310
...	...

SID	grade
142	B-
142	B
123	B+
857	A+
456	C
...	...

Questions about decomposition

20

❖ When to decompose

❖ How to come up with a correct decomposition (i.e., lossless join decomposition)

An answer: BCNF

21

❖ A relation R is in Boyce-Codd Normal Form if

- For every non-trivial FD $X \rightarrow Y$ in R , X is a super key
- That is, all FDs follow from “key \rightarrow other attributes”

❖ When to decompose

- As long as some relation is not in BCNF

❖ How to come up with a correct decomposition

- Always decompose on a BCNF violation (details next)
- ☞ Then it is guaranteed to be a lossless join decomposition!

BCNF decomposition algorithm

22

❖ Find a BCNF violation

- That is, a non-trivial FD $X \rightarrow Y$ in R where X is not a super key of R


❖ Decompose R into R_1 and R_2 , where

- R_1 has attributes $X \cup Y$
- R_2 has attributes $X \cup Z$, where Z contains all attributes of R that are in neither X nor Y

❖ Repeat until all relations are in BCNF


BCNF decomposition example

23

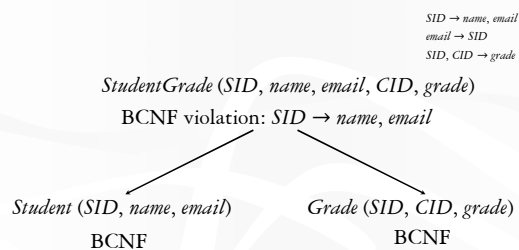

Another example

24

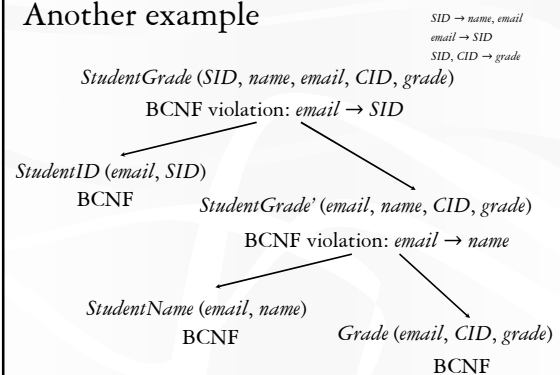

Why is BCNF decomposition lossless 25

Given non-trivial $X \rightarrow Y$ in R where X is not a super key of R , need to prove:

- ❖ Anything we project always comes back in the join:

$$R \subseteq \pi_{XY}(R) \bowtie \pi_{XZ}(R)$$
 - Sure; and it doesn't depend on the FD
- ❖ Anything that comes back in the join must be in the original relation:

$$R \supseteq \pi_{XY}(R) \bowtie \pi_{XZ}(R)$$
 - Proof will make use of the fact that $X \rightarrow Y$

Recap 26

- ❖ Functional dependencies: a generalization of the key concept
- ❖ Non-key functional dependencies: a source of redundancy
- ❖ BCNF decomposition: a method for removing redundancies
 - BCNF decomposition is a lossless join decomposition
- ❖ BCNF: schema in this normal form has no redundancy due to FD's

BCNF = no redundancy? 27

❖ *Student* ($SID, CID, club$)

- Suppose your classes have nothing to do with the clubs you join
- FD's?
 - None
- BCNF?
 - Yes
- Redundancies?
 - Tons!

<i>SID</i>	<i>CID</i>	<i>club</i>
142	CPS316	ball et
142	CPS316	sumo
142	CPS310	ball et
142	CPS310	sumo
123	CPS316	chess
123	CPS316	gol f
...

Multivalued dependencies 28

- ❖ A multivalued dependency (MVD) has the form $X \twoheadrightarrow Y$, where X and Y are sets of attributes in a relation R
- ❖ $X \twoheadrightarrow Y$ means that whenever two rows in R agree on all the attributes of X , then we can swap their Y components and get two new rows that are also in R

X	Y	Z
a	$b1$	$c1$
a	$b2$	$c2$
a	$b1$	$c2$
a	$b2$	$c1$
...

} Must be in R too

MVD examples 29

Student ($SID, CID, club$)

- ❖ $SID \twoheadrightarrow CID$
- ❖ $SID \twoheadrightarrow club$
 - Intuition: given SID , CID and $club$ are "independent"
- ❖ $SID, CID \twoheadrightarrow club$
 - Trivial: $LHS \cup RHS = \text{all attributes of } R$
- ❖ $SID, CID \twoheadrightarrow SID$
 - Trivial: $LHS \supseteq RHS$

Complete MVD + FD rules 30

- ❖ FD reflexivity, augmentation, and transitivity
- ❖ MVD complementation:
 - If $X \twoheadrightarrow Y$, then $X \twoheadrightarrow \text{attrs}(R) - X - Y$
- ❖ MVD augmentation:
 - If $X \twoheadrightarrow Y$ and $V \subseteq W$, then $XW \twoheadrightarrow YV$
- ❖ MVD transitivity:
 - If $X \twoheadrightarrow Y$ and $Y \twoheadrightarrow Z$, then $X \twoheadrightarrow Z - Y$
- ❖ Replication (FD is MVD):
 - If $X \rightarrow Y$, then $X \twoheadrightarrow Y$ Try proving things using these!?
- ❖ Coalescence:
 - If $X \twoheadrightarrow Y$ and $Z \subseteq Y$ and there is some W disjoint from Y such that $W \rightarrow Z$, then $X \rightarrow Z$

An elegant solution: chase

31

- ❖ Given a set of FD's and MVD's \mathcal{D} , does another dependency d (FD or MVD) follow from \mathcal{D} ?
- ❖ Procedure
 - Start with the hypothesis of d , and treat them as "seed" tuples in a relation
 - Apply the given dependencies in \mathcal{D} repeatedly
 - If we apply an FD, we infer equality of two symbols
 - If we apply an MVD, we infer more tuples
 - If we infer the conclusion of d , we have a proof
 - Otherwise, if nothing more can be inferred, we have a counterexample

Proof by chase

32

- ❖ In $R(A, B, C, D)$, does $A \twoheadrightarrow B$ and $B \rightarrow C$ imply that $A \rightarrow C$?

	Have				Need			
	A	B	C	D	A	B	C	D
	a	b1	c1	d1	a	b1	c2	d1
	a	b2	c2	d2	a	b2	c1	d2

$A \twoheadrightarrow B$

a	b2	c1	d1
a	b1	c2	d2

$B \rightarrow C$

a	b2	c1	d2
a	b2	c2	d1

$B \rightarrow C$

a	b1	c2	d1
a	b1	c1	d2

⌘

⌘

Another proof by chase

33

- ❖ In $R(A, B, C, D)$, does $A \rightarrow B$ and $B \rightarrow C$ imply that $A \rightarrow C$?

	Have				Need
	A	B	C	D	$c1 = c2$ ⌘
	a	b1	c1	d1	
	a	b2	c2	d2	

$A \rightarrow B$ $b1 = b2$

$B \rightarrow C$ $c1 = c2$

In general, both new tuples and new equalities may be generated

⌘

Counterexample by chase

34

- ❖ In $R(A, B, C, D)$, does $A \twoheadrightarrow BC$ and $CD \rightarrow B$ imply that $A \rightarrow B$?

	Have				Need
	A	B	C	D	$b1 = b2$ ⌘
	a	b1	c1	d1	
	a	b2	c2	d2	

$A \twoheadrightarrow BC$

a	b2	c2	d1
a	b1	c1	d2

Counterexample!

⌘

4NF

35

- ❖ A relation R is in Fourth Normal Form (4NF) if
 - For every non-trivial MVD $X \twoheadrightarrow Y$ in R , X is a superkey
 - That is, all FD's and MVD's follow from "key \rightarrow other attributes" (i.e., no MVD's and no FD's besides key functional dependencies)
- ❖ 4NF is stronger than BCNF
 - Because every FD is also a MVD


4NF decomposition algorithm

36

- ❖ Find a 4NF violation
 - A non-trivial MVD $X \twoheadrightarrow Y$ in R where X is not a superkey
- ❖ Decompose R into R_1 and R_2 , where
 - R_1 has attributes $X \cup Y$
 - R_2 has attributes $X \cup Z$ (Z contains R attributes not in X or Y)
- ❖ Repeat until all relations are in 4NF
- ❖ Almost identical to BCNF decomposition algorithm
- ❖ Any decomposition on a 4NF violation is lossless

4NF decomposition example

37

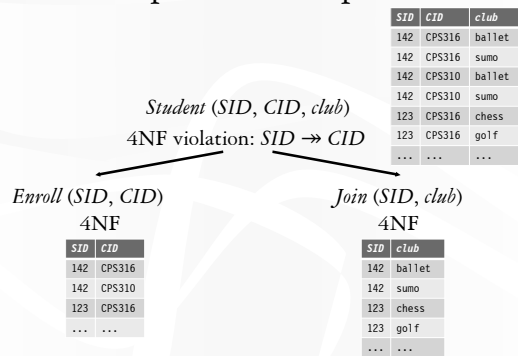

Summary

38

- ❖ Philosophy behind BCNF, 4NF:
Data should depend on the key, the whole key, and nothing but the key!
- ❖ Other normal forms
 - 3NF: More relaxed than BCNF; will not remove redundancy if doing so makes FDs harder to enforce
 - 2NF: Slightly more relaxed than 3NF
 - 1NF: All column values must be atomic