

CompSci 101

Introduction to Computer Science

Nov. 22 , 2016

Prof. Rodger



compsci101 fall2016

1

Clever Hangman - Dictionary

- Builds a dictionary of categories
- Start with list of words of correct size
- Repeat
 - User picks a letter
 - Make dictionary of categories based on letter
 - New list of words is largest category
 - Category includes already matched letters
 - List shrinks in size each time

cps101 fall 2016

3

Announcements

- Reading and RQ due next time
- Assignment 7 due next Tuesday
 - Assignment 8 and 9 out soon
- APT 9 out and due in a week and a half
- Today: Solving problems
 - How do change how things are sorted?
 - Other than ordering and re-ordering tuple
 - How do Python .sort and sorted() stack up?

compsci101 fall2016

2

Clever Hangman Example

- Possible scenario after several rounds

```
(secret word: calls) # words possible 176
You guessed a letter
You have this many guesses left: 4
Letters not guessed: bcdfghjklmnpqrstuvwxyz
guessed so far: _ a _ _ _
guess a letter or enter + to guess a word: d
```

- From list of words with **a** the second letter.
From that build a dictionary of list of words with **no d** and with **d** in different places:

_a__	147	Choose “no d”, most words, 147
add	1	
_a_d_	17	Only 17 words of this type
_ad__	3	
dadd	1	
_da_d_	1	Only 1 word of this type
_da__	6	

4

Clever Hangman

- How to start? How to modify assignment 5?

compsci101 fall2016

5

Playing go-fish, spades, or ...

- Finding right card?

- What helps?
- Issues here?



- Describe algorithm:

- First do this
- Then do this
- Substeps ok
- When are you done?



compsci101 fall2016

6

Problem Solving with Algorithms

- Top 100 songs of all time, top 2 artists?
 - Most songs in top 100
 - Wrong answers heavily penalized
 - You did this in lab, you could do this with a spreadsheet
- What about top 1,000 songs, top 10 artists?
 - How is this problem the same?
 - How is this problem different

compsci101 fall2016

7

Scale

- As the size of the problem grows ...

- The algorithm continues to work
- A new algorithm is needed
- New engineering for old algorithm

- Search

- Making Google search results work
- Making SoundHound search results work
- Making Content ID work on YouTube

compsci101 fall2016

8

Python to the rescue?

Top1000.py

```
import csv, operator

f = open('top1000.csv','rbU')
data = {}
for d in csv.reader(f,delimiter=',',quotechar=''):
    artist = d[2]
    song = d[1]
    if not artist in data:
        data[artist] = 0
    data[artist] += 1

itemlist = data.items()
dds = sorted(itemlist,key=operator.itemgetter(1),reverse=True)
print dds[:30]
```

compsci101 fall2016

9

Understanding sorting API

- How API works for `sorted()` or `.sort()`
 - Alternative to changing order in tuples and then changing back

```
x = sorted([(t[1],t[0]) for t in dict.items()])
x = [(t[1],t[0]) for t in x]

x = sorted(dict.items(),key=operator.itemgetter(1))
```

- Sorted argument is key to be sorted on, specify which element of tuple. Must import library `operator` for this

compsci101 fall2016

10

Sorting from an API/Client perspective

- API is Application Programming Interface, what is this for `sorted(..)` and `.sort()` in Python?
 - Sorting algorithm is efficient, stable: part of API?
 - `sorted` returns a list, doesn't change argument
 - `sorted(list,reverse=True)`, part of API
 - `foo.sort()` modifies `foo`, same algorithm, API
- How can you change how sorting works?
 - Change order in tuples being sorted,
 - `[(t[1],t[0]) for t in ...]`
 - Alternatively: `key=operator.itemgetter(1)`

compsci101 fall2016

11

Beyond the API, how do you sort?

- Beyond the API, how do you sort in practice?
 - Leveraging the stable part of API specification?
 - If you want to sort by number first, largest first, breaking ties alphabetically, how can you do that?
- Idiom:
 - Sort by two criteria: use a two-pass sort, first is secondary criteria (e.g., break ties)

```
[("ant", 5), ("bat", 4), ("cat", 5), ("dog", 4)]
[("ant", 5), ("cat", 5), ("bat", 4), ("dog", 4)]
```

compsci101 fall2016

12

Two-pass (or more) sorting

- Because sort is stable sort first on tie-breaker, then that order is fixed since stable

```
a0 = sorted(data, key=operator.itemgetter(0))
a1 = sorted(a0, key=operator.itemgetter(2))
a2 = sorted(a1, key=operator.itemgetter(1))
data
[('f', 2, 0), ('c', 2, 5), ('b', 3, 0),
 ('e', 1, 4), ('a', 2, 0), ('d', 2, 4)]
a0
[('a', 2, 0), ('b', 3, 0), ('c', 2, 5),
 ('d', 2, 4), ('e', 1, 4), ('f', 2, 0)]
```

compsci101 fall2016

13

Two-pass (or more) sorting

```
a0 = sorted(data, key=operator.itemgetter(0))
a1 = sorted(a0, key=operator.itemgetter(2))
a2 = sorted(a1, key=operator.itemgetter(1))
a0
[('a', 2, 0), ('b', 3, 0), ('c', 2, 5),
 ('d', 2, 4), ('e', 1, 4), ('f', 2, 0)]
a1
[('a', 2, 0), ('b', 3, 0), ('f', 2, 0),
 ('d', 2, 4), ('e', 1, 4), ('c', 2, 5)]
a2
[('e', 1, 4), ('a', 2, 0), ('f', 2, 0),
 ('d', 2, 4), ('c', 2, 5)]
```

compsci101 fall2016

14

Answer Questions
bit.ly/101f16-1122-1

SortByFreqs APT

Sort items by their frequency, then sorted in frequencies.

```
data = ["apple", "pear", "cherry", "apple", "pear", "apple", "banana"]
Returns: ["apple", "pear", "banana", "cherry"]
```

compsci101 fall2016

15

Answer Questions
bit.ly/101f16-1122-2

MedalTable APT

Sort items by their frequency, then sorted in frequencies.

```
["ITA JPN AUS", "KOR TPE UKR", "KOR KOR GBR", "KOR CHN TPE"]
Returns:
[ "KOR 3 1 0", "ITA 1 0 0", "TPE 0 1 1", "CHN 0 1 0", "JPN 0 1 0",
 "AUS 0 0 1", "GBR 0 0 1", "UKR 0 0 1"
]
```

compsci101 fall2016

16

Timingsorts.py, what sort to call?

- Simple to understand, hard to do fast and at-scale
 - Scaling is what makes computer science ...
 - Efficient algorithms don't matter on lists of 100 or 1000
 - Named algorithms in 201 and other courses
 - bubble sort, selection sort, merge, quick, ...
 - See next slide and TimingSorts.py
- Basics of algorithm analysis: theory and practice
 - We can look at empirical results, would also like to be able to look at code and analyze mathematically! How does algorithm scale?

compsci101 fall2016

17

New sorting algorithms happen ...

- timsort is standard on...
 - Python as of version 2.3, Android, Java 7
 - According to <http://en.wikipedia.org/wiki/Timsort>
 - Adaptive, stable, natural mergesort with supernatural performance
- What is mergesort? Fast and Stable
 - What does this mean?
 - Which is most important?
 - Nothing is faster, what does that mean?
 - Quicksort is faster, what does that mean?

compsci101 fall2016

18

TimingSorts.py


size	create	bubble	select	timsort
1000	0.026	0.127	0.081	0.002
2000	0.045	0.537	0.273	0.001
3000	0.058	1.126	0.646	0.002
4000	0.082	2.174	1.208	0.003
5000	0.101	3.521	1.862	0.003
6000	0.118	4.617	3.005	0.004
7000	0.168	7.504	4.237	0.005
8000	0.156	9.074	6.152	0.007
9000	0.184	11.611	8.089	0.007
10000	0.212	14.502	9.384	0.008

compsci101 fall2016

19

Stable, Stability

- What does the search query 'stable sort' show us?
 - Image search explained
 - First shape, then color: for equal colors?

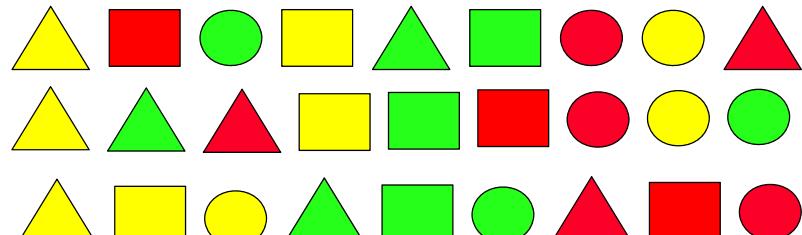


compsci101 fall2016

20

Stable sorting: respect re-order

- Women before men ...
 - First sort by height, then sort by gender

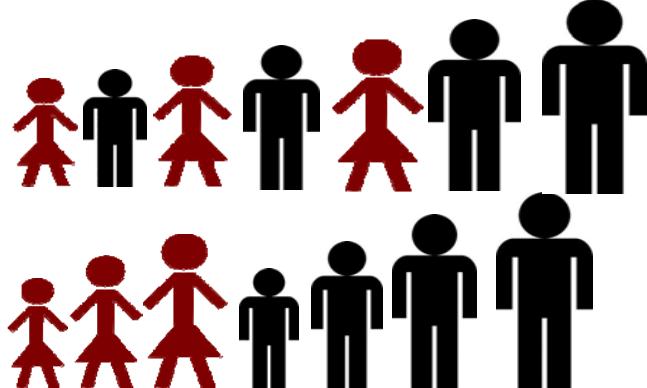

compsci101 fall2016

21

How to import: in general and sorting

- We can write: import operator
 - Then use `key=operator.itemgetter(...)`
- We can write: `from operator import itemgetter`
 - Then use `key=itemgetter(...)`
- `From math import pow, From cannon import pow`
 - Oops, better not to do that, use dot-qualified names like `math.sqrt` and `operator.itemgetter`

22

TimingSorts.py Questions
bit.ly/101f16-1122-3

compsci101 fall2016

23