


Combining Turing Machines

We will define notation that will make it easier to look at more complicated Turing machines

1. Given Turing Machines M1 and M2

Notation for


- Run M1
- Run M2

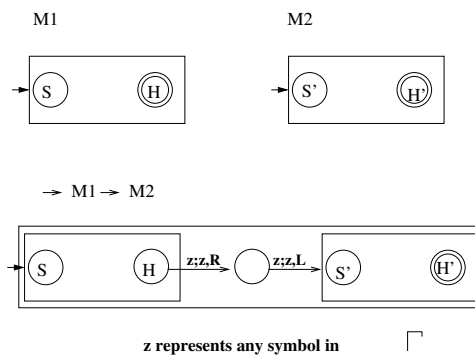

2. Given Turing Machines M1 and M2

Notation for



- Run M1
- If x is current symbol
 - then Run M2

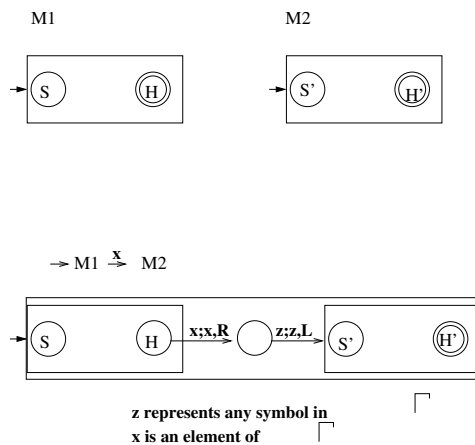

3. Given Turing Machines M1, M2, and M3

Notation for

- Run M1
- If x is current symbol
 - then Run M2
 - else Run M3

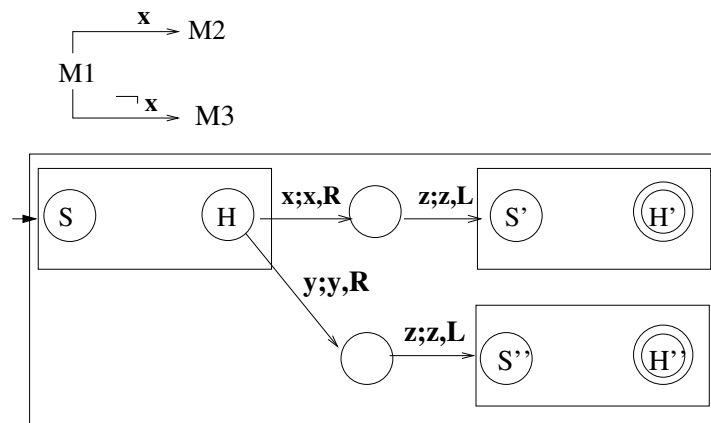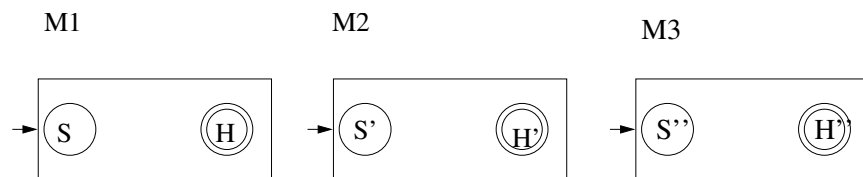

x is an element of Γ
 y is any element except x from Γ
 z is any element from Γ

More Notation for Simplifying Turing Machines

Suppose $\Gamma = \{a, b, c, B\}$

z is any symbol in Γ

x is a specific symbol from Γ

1. s - start
2. R - move right

3. L - move left

4. x - write x (and don't move)

5. R_a - move right until you see an a

6. L_a - move left until you see an a

7. $R_{\neg a}$ - move right until you see anything that is not an a

8. $L_{\neg a}$ - move left until you see anything that is not an a

9. h - halt in a final state
10. $\xrightarrow{a,b} \xrightarrow{w}$
 If the current symbol is a or b, let w represent the current symbol.


Example

Assume input string $w \in \Sigma^+$, $\Sigma = \{a, b\}$.

If $|w|$ is odd, then write a b at the end of the string. The tape head should finish pointing at the leftmost symbol of w .

input: bab, output: babb

input: ba, output: ba



What is the running time?

Example

Assume input string $w \in \Sigma^+$, $\Sigma = \{a, b\}$, $|w| > 0$

For each a in the string, append a b to the end of the string.

input: $abbabb$, output: $abbabbbb$

The tape head should finish pointing at the leftmost symbol of w .

Turing's Thesis Any computation that can be carried out by a mechanical means can be performed by a TM.

Definition: An *algorithm* for a function $f:D \rightarrow R$ is a TM M , which given input $d \in D$, halts with answer $f(d) \in R$.

Example: $f(x + y) = x + y$, x and y unary numbers.

start with:	111+1111
	↑
end with:	1111111
	↑


Example: Copy a String, $f(w)=w0w$, $w \in \Sigma^*$, $\Sigma = \{a, b, c\}$

Denoted by C

```
start with:      abac
                  ↑
end with:        abac0abac
                  ↑
```

Algorithm:


- Write a 0 at end of string
- For each symbol in string
 - make a copy of the symbol

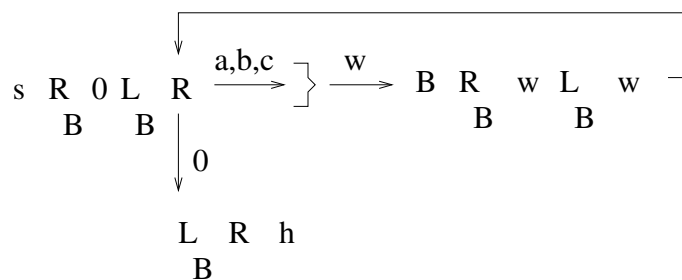

Example: Shift the string that is to the right of tape head to the left,
denote by S_L (shift left)

start with:	babcaBba
	↑
end with:	ba ca BBba
	↑

(similar to S_R)

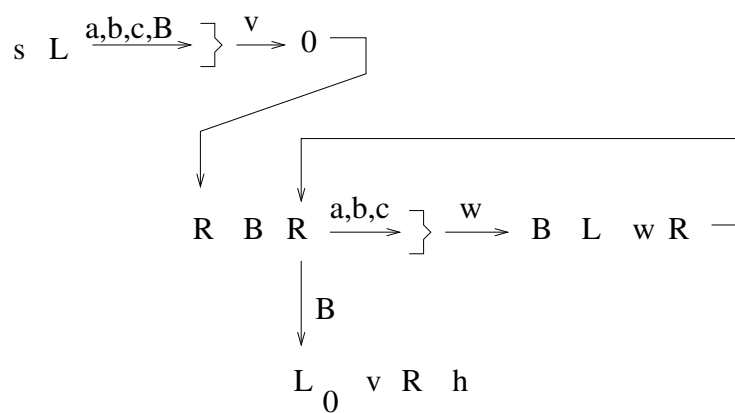

Example: Add unary numbers

This time use shift.

Example: Multiply two unary numbers, $f(x*y)=x*y$, x and y unary numbers. Assume $x,y>0$.

start with: 1111*11
 ↑

end with: 11111111
 ↑