
Compsci 101 7-steps, Functions, Order of Execution

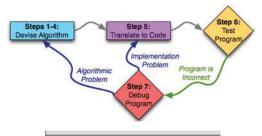

Susan Rodger January 13, 2022

filename: Laundry.py

def minutesNeeded(m):
 """

Return integer number of minutes
 """

Compsci 101, Spring 2022

1

c is for ...




- Computer Science and Computing
 - It's what we do
- Collaboration
 - Review the policy
- Cookies
 - Good for the web and for ...
- CSV
 - Comma Separated Values: Data

1/13/22 Compsci 101, Spring 2022

Ayanna Howard

- Educator, Researcher and Innovator
- Professor & Chair of the School of Interactive Computing, Georgia Tech
- Now Dean of Engineering at The Ohio State University!
- Robotics Robots and Bias, Robots changing lives of children with disabilities, Robots beyond part of the family
- Top 50 U.S. Women in Tech, Forbes, 2018







Announcements

- Lab 01 Friday,
 - Complete Prelab before going to lab
- APT-1 out today, due Thursday, January 20
- Assignment 0 due Tuesday, January 18
- Sakai quizzes on readings due 10:15am on date due
 - Get three tries, score highest score
 - First two weeks we allow you to submit late
 - First 5 quizzes turn off, 10:15am Jan 20
- Read Ed Discussion Every Day You will learn things!
- Reminder: Ed Discussion back channel

1/13/22 Compsci 101, Spring 2022 4

Join Duke Mailing lists compsci@duke.edu

- Mailing list about
 - Jobs, internships, research positions
 - Events related to computer science
- How to join:
 - Go to: lists.duke.edu
 - Be sure to authenticate
 - Add <u>compsci@duke.edu</u>
- BE IN THE KNOW ABOUT COMPSCI!

/13/22 Compsci 101, Spring 2022 5


PFTD

- Functions
- Order of execution
- 7 steps of programming
- APTs
- Testing and Submitting APTs

/13/22 Compsci 101, Spring 2022 6

What is a Function?

- Function has:
 - Name
 - Maybe inputs
 - Processes or calculates something
 - Has a result

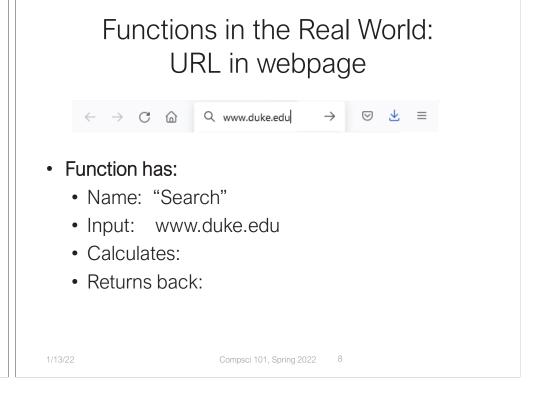

Functions in the Real World: calculator

Function has:

Name: calculator

• Input: number(s), operator

• Example: 25, squareroot

· Calculates:

· Returns back:

Calculator		-	
≡ St	andard	79	9
			0
MC	MR M+	M-	MS M*
%	CE	С	•
1/x	x ²	∛x	<u> </u>
7	8	9	×
4	5	6	
1	2	3	+
+/_	0	850	=

Functions in the Real World: Counting words in Microsoft Word





- Function has:
 - Name:
 - Input:
 - · Calculates:
 - · Returns back:

1/13/22

Compsci 101, Spring 2022

13

Built-in Python Function – len() already exists, you use it

Compsci 101, Spring 2022 10

• len() function

Examples:

Function has:

Name: len

x = len("duke")

Input: a string

value of x:

 Calculates: number of characters in string

y = len("computer")

• Returns back: number

value of y:

Built-in Python Function – str() already exists, you use it

Examples:

• str() function

x = str(623)

Function has:

value of x:

Name: str

Input: an expression

Calculates: string version of expression's value

Returns back: string

3/22 Compsci 101, Spring 20

1/13/22

Compsci 101, Spring 2022

17

Other Python built-in functions

- type(something)
- Returns type of variable something

• int(7.8)

 Returns integer value of decimal number, e.g. 7

• float(4)

 Returns float value of integer, e.g. 4.0

Compsci 101, Spring 2022 19

print() function

- General function has: print("hi cat")
 - Name
 - Maybe inputs
 - Processes or calculates something
 - Has a result

- Name: print
- Input: "hi cat"
- "processes", generates output
- No return value, returns None

1/13/22 Compsci 101, Spring 2022 2

Example with lines numbered:

```
1  x = float(6)
2  print("x is", x)
3  y = print("x is", x)
4  print("y is", y)
```

Output:

Writing your own Python function

Format:

```
def nameOfFunction(parameters):
     <body, or lines of code>
     return value # optional, but likely
```

Compsci 101, Spring 2022 26

1/13/22 Compsci 101, Spring 2022 21 1/13/22

Writing your own Python function

Format:

```
def nameOfFunction(parameters):
   <body, or lines of code>
                     # optional, but likely
   return value
```

• Example define function:

```
def inchesToCentimeters(inches):
   centi = inches * 2.54
   return centi
```

Compsci 101, Spring 2022 27

Writing your own Python function

Format:

```
def nameOfFunction(parameters):
   <body, or lines of code>
                     # optional, but likely
   return value
```

• Example define function:

```
def inchesToCentimeters(inches):
   centi = inches * 2.54
                                Output:
   return centi
                                25.4
```

Use or call function:

```
answer = inchesToCentimeters(10.0)
print(answer)
```

Compsci 101, Spring 2022 28

Writing your own Python function

- Parameter
 - Variable, place holder for a value
 - In parenthesis in first line of definition of function
- Argument
 - Expression or value
 - In parenthesis when calling or using a function
- Example:

```
def inchesToCentimeters(inches):
   centi = inches * 2.54
   return centi
                             parameter
```

Use or call function:

```
answer = inchesToCentimeters(10.0)
print(answer)
                   argument
```

Compsci 101, Spring ∠u

What happens when executes?

```
def inchesToCentimeters(inches):
           centi = inches * 2.54
                                               Output:
10
           return centi
11
12
     ________if ___name___ == '___main___':
13
           answer = inchesToCentimeters(10.0)
14
           print(answer)
15
           answer = inchesToCentimeters(3.0)
16
17
           print(answer)
```

Start on line 1 of the file and move line by line The first 7 lines are blank or are a comment, ignore.

Compsci 101, Spring 2022

Let's go see this in Pycharm and add a function

```
def pluralize(word):
                                     Add this function
    word = word + "es"
    return word
newWord = pluralize("fish")
print(newWord)
                                    Add these lines
word1 = "dress"
                                     of code that call
word2 = pluralize(word1)
                                    the function
print(word2)
word1 = "book"
print(pluralize(word1))
                     Compsci 101, Spring 2022 45
```

WOTO – Working Together (breakout groups)

- Given a bitly link
 - Type it in OR click on it on the calendar
 - http://bit.ly/101s22-0113
- What you should do:
 - Introduce yourselves
 - Each person fills out google form
 - · Put in your name, email and netid
 - · Discuss each question and fill out
 - Be mindful of time

Compsci 101, Spring 2022 46

Link 3

Link 4

WOTO: Calling Functions http://bit.ly/101s22-0113-1

APTs in 101 and 201

- Algorithm Problem-solving and Testing
 - Algorithm that's Automatically Tested
 - In use at Duke since 2003, million+ APTs solved
- Given a problem statement
 - Read, think, plan on paper ...
 - Write a function to solve the problem
 - Submit the code for testing, debug if necessary
- Where do you start with problem solving?

Compsci 101, Spring 2022 47

Compsci 101, Spring 2022 49

The Seven Steps Programming Process: High-level

Steps 1-4: Devise Algorithm

- First part: devise the algorithm
 - The meta-problem solving piece
 - Big/complex enough to be 4 steps (more shortly)

Compsci 101, Spring 2022 50

The Seven Steps Programming Process: High-level



- After devising the algorithm, translate to code
 - Plan first, then code
 - Bridge analogy: blue prints, then construction
 - Essay analogy: outline, then prose


Compsci 101, Spring 2022 51

The Seven Steps Programming Process: High-level




- Next test our program
 - Testing important, often under-taught skill

The Seven Steps Programming Process: High-level

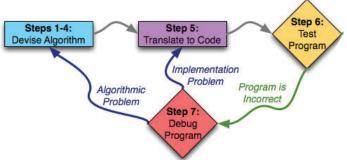

- Ideally would be correct first time; may need to debug
 - Identify problem (with science!)
 - Return to appropriate prior step to fix the problem


The Seven Steps Programming Process: High-level

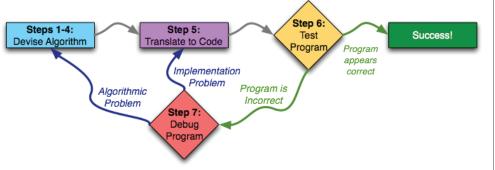

Work through cycle until program works


Compsci 101, Spring 2022 54

Steps 1—4: Devise Algorithm

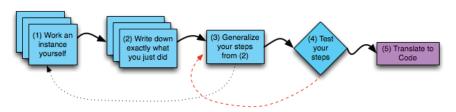


- Steps 1—4: devise the algorithm
 - Learn to do this well, be an excellent programmer
 - Language: does not matter

Steps 1—4: Example: Calculate the average of two numbers

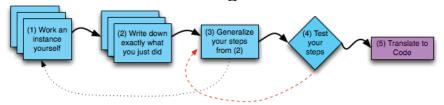


- Step 1: 2 + 5 = 7, 7/2 = 3.5
- Step 2:
 - Add 2 + 5 and get 7
 - Divide 7 by 2 and the result is 3.5

Steps 1—4: Example: Calculate the average of two numbers



- Step 3:
 - Two variables num1 and num2
 - Add the two numbers together: result is num1 + num2
 - Divide the result by 2 and you have the answer answer is result / 2

Steps 1—4: Example: Calculate the average of two numbers




- Step 4: Try a different example
 - Use 8 and 6, num1 is 8, num2 is 6
 - Add the two numbers together: result is num1 + num2, is 14
 - Divide the result by 2 and you have the answer -Answer is result/2, which is 7
- IT WORKS!

Compsci 101, Spring 2022 58

Step 5: let's convert it to code!


- Go to Pycharm
- We will also:
 - Test it Step 6
 - Debug it Step 7

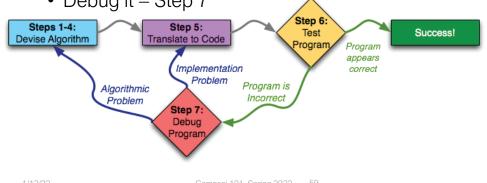


Seven Steps Steps 1-4 (1) Work an (3) Generalize instance your steps exactly what (5) Translate to yourself from (2) you just did Steps 1-7 Success! Translate to Code Implementation Program is Problem

Solving Laundry APT

 Navigate to APTs in class website and ...

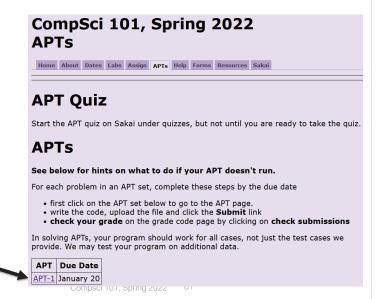

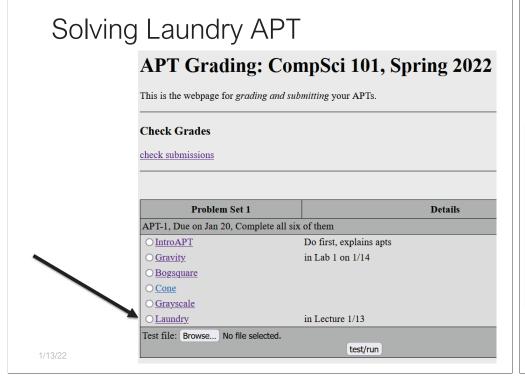


Solving Laundry APT

Navigate to APTs in class website and ...

Problem Statement

Consider the problem of trying to do a number of loads of laundry, given only one washer and one dryer. Washing a load takes 25 minutes, drying a load takes 25 minutes, and folding the clothes in a load takes 10 minutes, for a total of 1 hour per load (assuming that the time to transfer a load is built into the timings given). 10 loads of laundry can be done in 10 hours, 600 minutes, using the method of completing one load before starting the next one. Though it can be done faster, see examples.

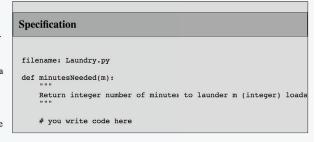

Write the method, minutesNeeded, that returns the shortest time needed to do m loads of laundry. In other words, given an integer value representing the number of loads to complete, m, determine the smallest number of minutes needed to complete all loads of laundry.

Compsci 101, Spring 2022 63

Solving Laundry APT – Step 1 WOTO: http://bit.ly/101s22-0113-2


What is important info?

Problem Statement

Consider the problem of trying to do a number of loads of laundry, given only one washer and one dryer. Washing a load takes 25 minutes, drying a load takes 25 minutes, and folding the clothes in a load takes 10 minutes, for a total of 1 hour per load (assuming that the time to transfer a load is built into the timings given). 10 loads of laundry can be done in 10 hours, 600 minutes, using the method of completing one load before starting the next one. Though it can be done faster, see examples.

Specification filename: Laundry.py def minutesNeeded(m): Return integer number of mi # you write code here

Write the method, minutes Needed, that returns the shortest time needed to do m loads of laur representing the number of loads to complete, m, determine the smallest number of minutes n

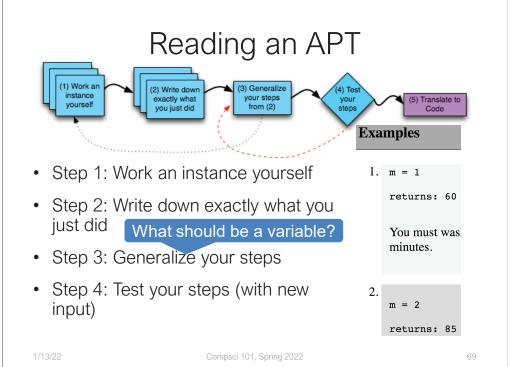


Solving Laundry APT – Steps 3 and 4 WOTO: http://bit.ly/101s22-0113-2

What is important info?

Problem Statement

Consider the problem of trying to do a number of loads of laundry, given only one washer and one dryer. Washing a load takes 25 minutes, drying a load takes 25 minutes, and folding the clothes in a load takes 10 minutes, for a total of 1 hour per load (assuming that the time to transfer a load is built into the timings given). 10 loads of laundry can be done in 10 hours, 600 minutes, using the method of completing one load before starting the next one. Though it can be done faster, see examples.



Write the method, minutesNeeded, that returns the shortest time needed to do m loa

Solving an APT

- Create new project
 - File > New Project
 - Existing interpreter (first project you made from installation)
- · Create new Python File
 - Right click on project > New > Python File
- Create function within module
 - Name it properly!

1/13/22

Compsci 101, Spring 2022


71

Names and Return 0 Submission


Take small steps to get all green!







APT Correct → The Green Dance(Fall 2020)

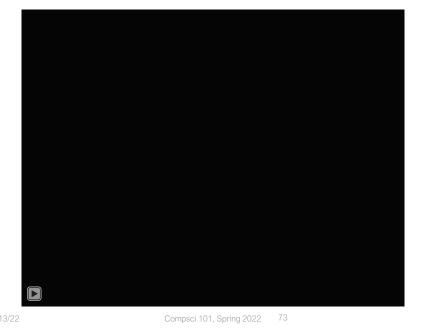

APT Testing and Submission

- You wrote the code, how is it tested?
 - Submit .py file with function to server
 - Server imports it
 - Server tests and checks by calling your function
- The APT testing framework calls your code!
 - Don't call us, we'll call you: Hollywood principle



Laundry dissected

def minutesNeeded(m):


Wrote formula using code to define a function

/13/22 Compsci 101, Spring 2022 75

Testing Laundry – three ways

- 1) Run on the apt page
 - Need internet connection, may take time
- 2) Locally in Python Program Laundry
 - Get it working before you use apt page

Testing Laundry – three ways

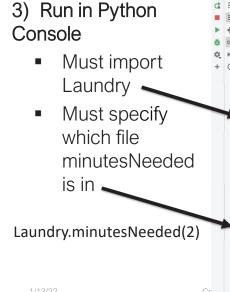

```
☐ ⇒ Python Console

= = >>> minutesNeeded(2)
    Traceback (most recent call last):
     File "C:\Users\Susan\AppData\Local\Programs\F
        exec(code, self.locals)
      File "<input>", line 1, in <module>
    NameError: name 'minutesNeeded' is not defined
       import Laundry
    >>> minutesNeeded(2)
    Traceback (most recent call last):
     File "C:\Users\Susan\AppData\Local\Programs\F
        exec(code, self.locals)
     File "<input>", line 1, in <module>
    NameError: name 'minutesNeeded' is not defined
    >>> Laundry.minutesNeeded(2)
    >>> import math
   >>> math.sin(0.0)
   0.0
```

Where to put/use what in Python file

- Top: docstring with date and username
- Function definitions right after docstring
- Test code inside if __name__ == '__main__':
- Variables inside vs outside a function
 - *Only* use the variables inside that function
 - Therefore, *do not* use the variables outside the function (like in the main)
 - Your code will not work on the server

Compsci 101, Spring 2022 80

