

L21: (Balanced) Binary Search Trees

Alex Steiger

CompSci 201: Spring 2024

4/1/2024

4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

1

1

Logistics, Coming up

- This Wednesday, April 3
 - APT 8 due
- Next Monday, April 8
 - Project P5: Huffman due
- Next Wednesday, April 10
 - APT Quiz 2 due
 - Covers linked list, sorting, trees
 - No regular APTs this week, just the quiz

4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

2

2

Reminder: What is an APT Quiz?

- Set of 3 APT problems, 2 hours to complete.
 - Will be available starting this Saturday afternoon (look for a Canvas/email announcement)
 - Must *complete* by 11:59 pm Wednesday 4/12 (so start before 10)
- Start the quiz from link in instructions doc (like Quiz 1), begins your timer
 - Will look/work just like the regular APT page, just with only 3 problems.

4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

3

3

Reminder: What is allowed?

Yes, allowed

- Zybook
- Course notes
- API documentation
- VS Code
- Jshell
- Searching internet for API usage, common patterns

No, not allowed

- Collaboration or sharing any code, including with ChatGPT/Copilot/other generative AI.
- Communication about the problems **at all** during the window.
- Searching internet for solutions.

4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

4

4

Reminder: Don't do these things

1. Do not collaborate. Note that we log all code submissions and will investigate for academic integrity.
2. Do not hard code the test cases (if(input == X) return Y, etc.).
We show you the test cases to help you debug. But we search for submissions that do this and **you will get a 0 on the APT quiz if you hard code the test cases** instead of solving the problem.

4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

5

5

Reminder: How is it graded?

Not curved, adjusted. 3 problems, 10 points each.

Raw score R out of 30.	Adjusted score A out of 30.	100 point grade scale
27 <= R <= 30	A = R	90 - 100
24 <= R <= 26	A = 26	~87
21 <= R <= 23	A = 25	~83
18 <= R <= 20	A = 24	80
15 <= R <= 17	A = 23	~77
12 <= R <= 14	A = 22	~73
9 <= R <= 11	A = 21	70
6 <= R <= 8	A = 20	~67
3 <= R <= 5	A = 19	~63
1 <= R <= 2	A = 18	60

Can still get in the B range even if you can't solve one; don't panic!

Only going to get a 0 if you collaborate or hard code test cases. Don't do it!

4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

6

6

Binary Heap Wrapup

Reminder: You can see a simple DIY implementation of an array-based (actually ArrayList) binary heap at <https://coursework.cs.duke.edu/cs-201-spring-24/live-coding/-/tree/main/DIYBinaryHeap>

4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

7

7

java.util.PriorityQueue API

Method	Behavior	Runtime Complexity
<code>add(element)</code>	Add an element to the priority queue	$O(\log(N))$ comparisons
<code>remove()</code>	Remove and return the minimal element	$O(\log(N))$ comparisons
<code>peek()</code>	Return (do *not* remove) the minimal element	$O(1)$
<code>size()</code>	Return number of elements	$O(1)$

4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees


8

8

Binary Heap at a high level

A **binary heap** is a binary tree satisfying the following structural invariants:

- **heap property:** every node is less than or equal to its successors, and
- **shape property:** the tree is **complete** (full except possibly last level, in which case it should be filled from left to right)



4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

9

9

WOTO

Go to duke.is/9/znk3

Not graded for correctness, just participation.

Try to answer *without* looking back at slides and notes.

But do talk to your
neighbors!




4/1/20

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

10

decreaseKey Operation?

- decreaseKey(val, newVal)
changes val in heap to
(smaller) newVal
- Suppose we decrease the
13 to 5
- Violates heap property
- Fix like in the add
operation:
 - While violating heap
property, swap with parent



4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

11

decreaseKey NOT in `java.util`

- decreaseKey is important for some algorithms, but not supported in many standard libraries (including the `java.util.PriorityQueue`)
 - Used in later lectures!
- Why not supported?
 - Note that binary heap does not support efficient **search**
 - In order to do decreaseKey in $O(\log(n))$ time, need to store **references/indices** of all the "nodes."
 - Adds overhead, not done in `java.util`

4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

12

L20-WOTO2-BinaryHeap-Sp24

Hi, Alexander. When you submit this form, the owner will see your name and email address.

* Required


1

NetID *

solutions

2

Which of the following correctly shows the order in which elements of this heap would be stored in an array representation? *

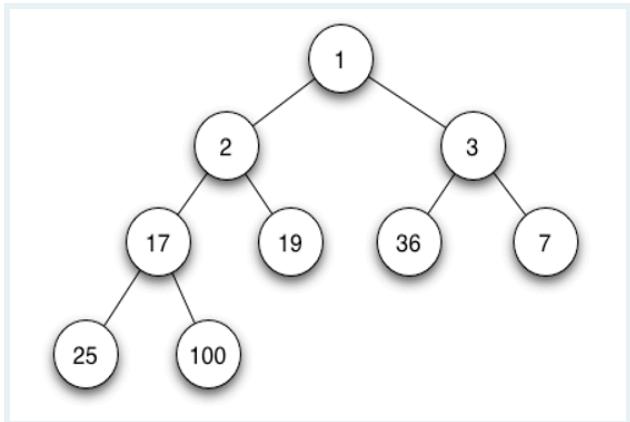

- 1, 2, 17, 25, 100, 19, 3, 36, 7
- 1, 2, 3, 7, 17, 19, 25, 36, 100
- 1, 2, 3, 17, 19, 36, 7, 25, 100

3

When 1-indexing, if a value in the heap is stored at **index 11** in the array representation, at which index will its **parent** be stored? * 

5

6

10


12

21

22

4

Suppose we add the value 20 to this heap. At what index in the array representation will it be added before any swapping? Assume we are 1-indexing the array (that is, the first element is stored at index 1). * 

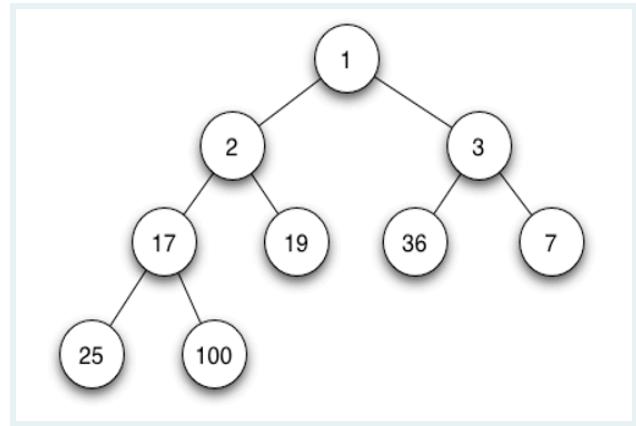

0

1


9

10

20

5

Suppose we add the value 20 to this heap. How many swaps will be needed to reestablish the heap property? *

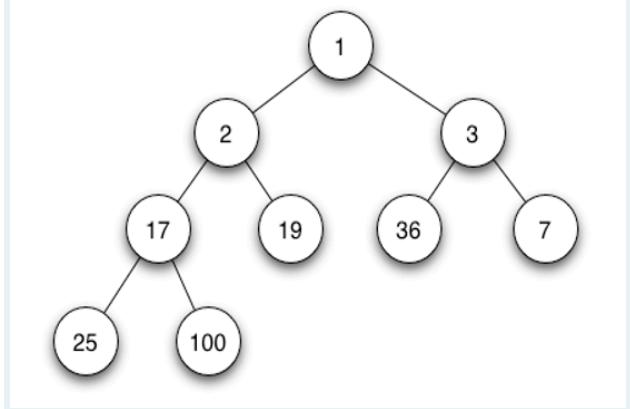

0

1


2

3

6

Suppose we remove the minimum value from this heap. AFTER replacing the root with the last node in the heap, how many swaps will be necessary to reestablish the heap property? *

0

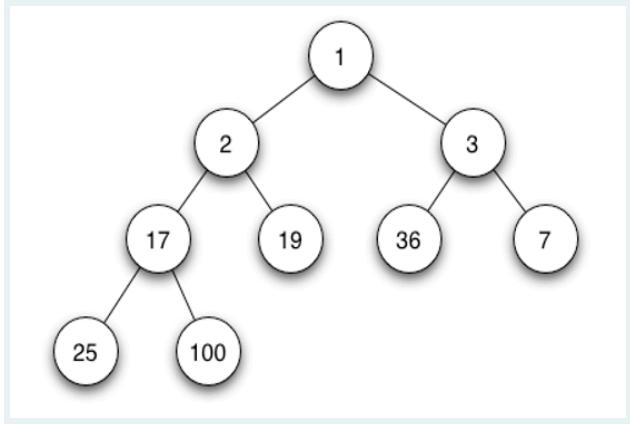

0

1

2

3

True or false: For a heap with $N > 3$ elements, it is possible that an add or remove operation might require N swaps to reestablish the heap property. * 

True

False



This content is created by the owner of the form. The data you submit will be sent to the form owner. Microsoft is not responsible for the privacy or security practices of its customers, including those of this form owner. Never give out your password.

[Microsoft Forms](#) | AI-Powered surveys, quizzes and polls [Create my own form](#)

[Privacy and cookies](#) | [Terms of use](#)

Alternative Implementation: Balanced Binary Search Tree

A binary tree is a binary **search** tree if for every node:

- Left subtree values are all **less than** the node's value

AND

- Right subtree values are all **greater than** the node's value

According to some ordering (natural ordering if Comparable or defined by Comparator)



Enables efficient search, similar to binary search!


4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

13

Alternative Implementation: Balanced Binary Search Tree

- If your keys happen to be unique...
- Can support $O(\log(n))$ add & remove (including smallest) using a **balanced** binary search tree!
- Smallest is leftmost child




CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

14

Removing the Minimum

- Smallest is leftmost child
- Iterate left until no left child
 - This is the node to remove and value to return
- How to repair BST after removal?




CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

15

Removing the Minimum

- Smallest is leftmost child
- Iterate left until no left child
 - This is the node to remove and value to return
- How to repair BST after removal?
 - If leftmost is a leaf, set parent's left to null




4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

16

Removing the Minimum

- How to repair BST after removal?
 - If leftmost is a leaf, set parent's left to null
 - If leftmost has right child?
 - Leftmost's right child becomes parent's left child
 - BST property restored!




CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

17

Removing the Minimum

- How to repair BST after removal?
 - If leftmost is a leaf, set parent's left to null
 - If leftmost has right child?
 - Leftmost's right child becomes parent's left child
 - BST property restored!
 - If leftmost has left child? Can't happen (not the leftmost)



4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees


18

18

Aside: Removing any node?

Updated 4/4/24

- How to repair BST after removal?
 - Removal for node with 0-1 children generalizes from leftmost case
 - Node with 2 children?
 - Replace it with **minimum** in **right** subtree (leftmost), then remove it using previous remove-min procedure
 - Restores BST property

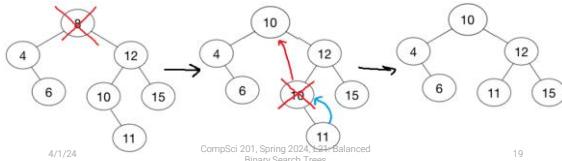

19

Disadvantages to using a Binary Search Tree for your priority queue?

1. All elements must be unique
(There exist variations of BSTs that handle duplicates, but more complicated / depends on usage)
2. Not array-based, uses more memory and has higher constant factors on runtime
3. Much harder to implement with **guarantees that the tree will be balanced.** **???**

4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

21

Live Coding

- BST with RemoveMin

4/1/24

CompSci 201, Spring 2024, L21: Balanced
Binary Search Trees

22